



FIRE CABINET



FIREGUARD GLOBAL LTD.

Tel: 00-44-8450751042 • Fax: 00-44-8459751043

Email: Info@Fireguard-Uk.com • www.fireguard-Uk.com

Unit 11 • Chancel Industrial Estate • Newhall Street
Willenhall • WV13 1NX • United Kingdom





FIRE CABINET



www.fireguard-uk.com

Fireguard has wide range of cabinets manufactured with 1.2mm thickness Steel Powder Coated.

Can be customized according to the architectural requirements.

- Cabinet can be customized fabricate up to 3mm thickness Mild Steel/Stainless Steel

- Door sign according to 92/58/EEC 35mm Ø

- Knockouts for inlet pipework both sides.

- Finish: Red powder coated, Stainless Steel/Brush/Mirror/Satin finish upon request.

Customized Cabinets:

Fire Guard Cabinet specifications are customized as per as your request

Standard Size:

- Single Cabinet - 80x80x30 cm
- Double Cabinet - 160x80x30 cm
- Double Cabinet Horizontal - 110x80x30 cm

OPTION

A-Wired Glass door is available

B-Stainless steel

C-Mild steel

R-Recessed



KM 705505



FGCS 05



FGCR 06



FGCR 06 B/C



FGCS 05B



FGCD 03



FGCRD 03



FGCRD 03B/C



FGCD 03B



FGCS 09



FGCRD 10



FGCRD 10B/C



FGCD 09B



BREECHING INLET
Standard Size:
 Surface & Semi Recessed
 Single Cabinet 59.5 x 39.5 x 29.5 cm

EXTINGUISHER CABINET

Standard Size:

Surface & Semi Recessed

Cabinet KG Powder-60 x 28 x 18 cm




Cabinet 12KG Powder-70 x 30 x 22 cm

Cabinet 5KG Co2- 80 x 30 x 22 cm






Surface Mounted Fire Hose Cabinet


• Mild Steel Cabinet

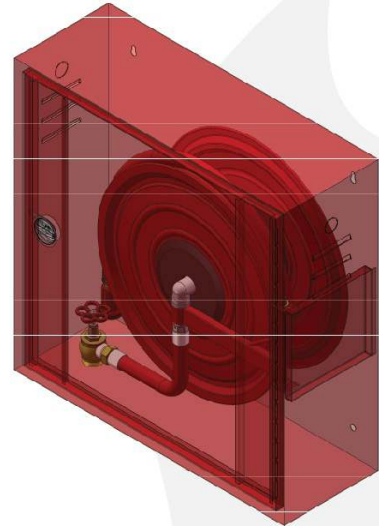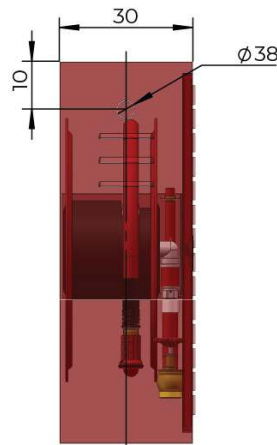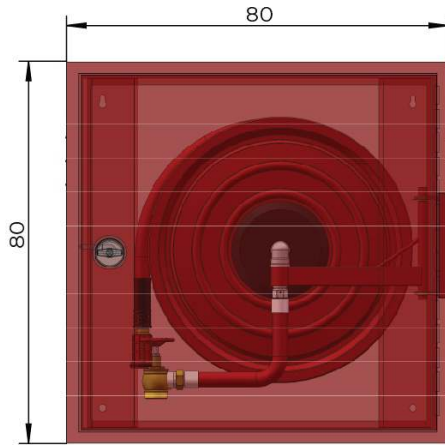

• Stainless Steel Cabinet

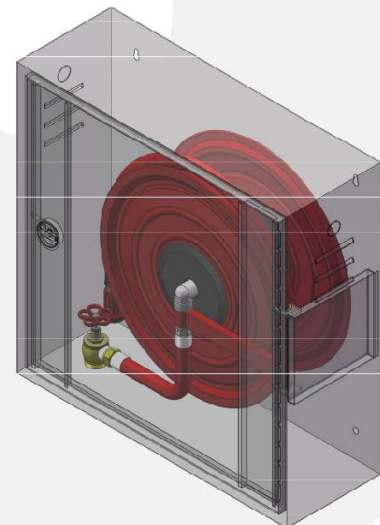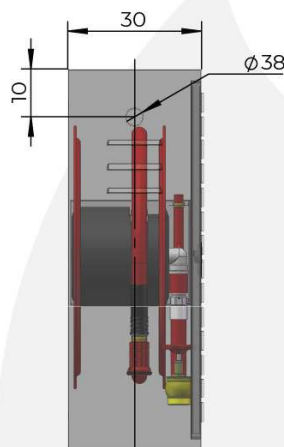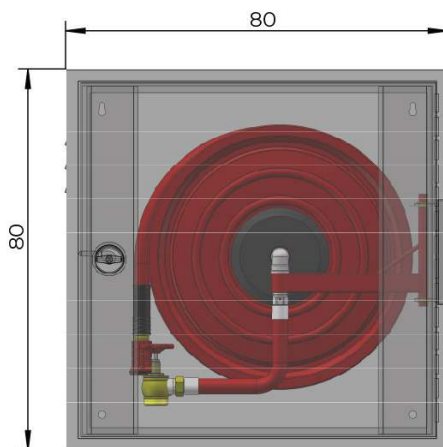

Recessed Fire Hose Cabinet

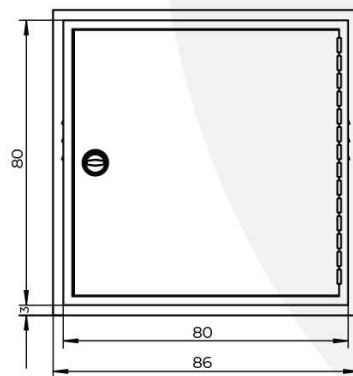

Technology Requirement:

1. Red polyester powder coated finish.
2. Surface Colour: RAL3000
3. Full length piano hinges
4. 1.2mm thickness body&door
5. Stainless steel round lock
6. Size: 80x80x30 cm

7. Size For Recessed:

- Single Cabinet: 86x86x30 cm
- Double Cabinet: 166x86x30 cm




Option: Stainless Steel body&door 304

Size: customized as per as your request



Surface Mounted Fire 2.5" Hose Reel Cabinet

Option: Recessed Fire 2.5" Hose Reel Cabinet

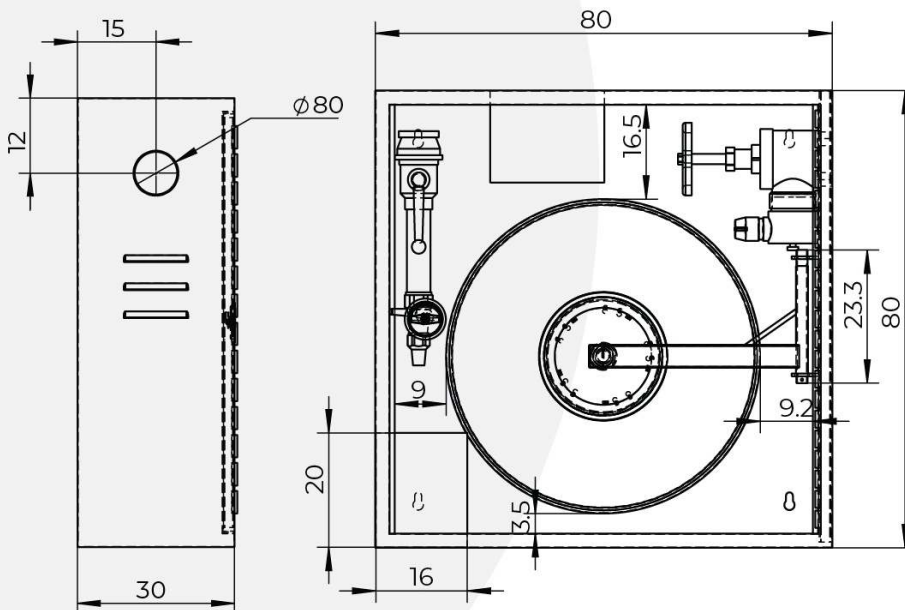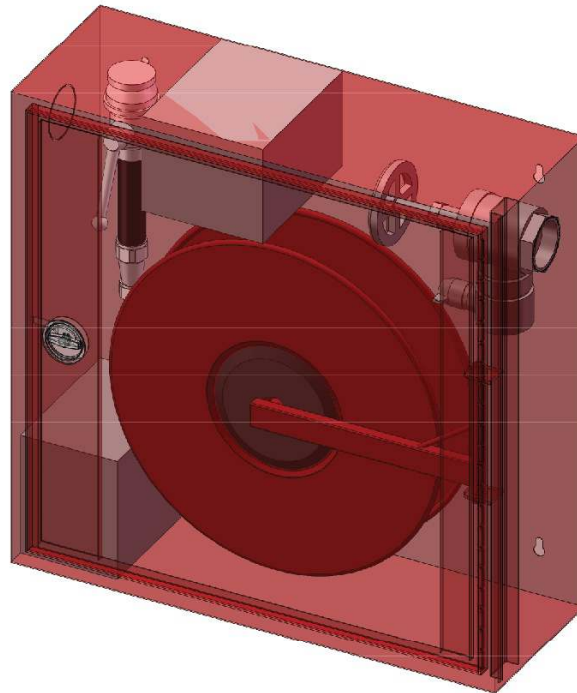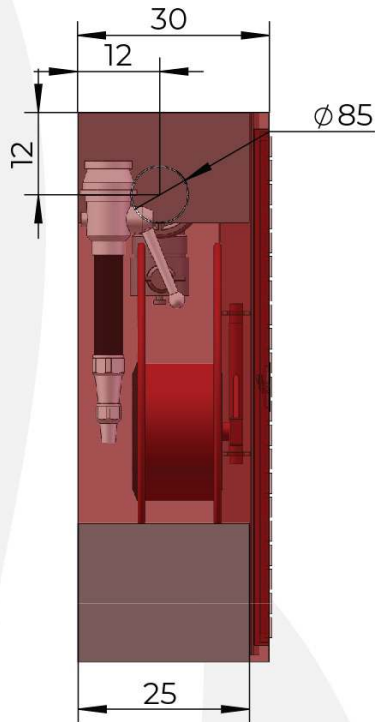

Technology Requirement:


1. Red polyester powder coated finish.
2. Surface Colour: RAL3000
3. Full length piano hinges
4. 1.2mm thickness body&door
5. Stainless steel round lock
6. Size: 80x80x30 cm
7. **Size For Recessed:** 86x86x30 cm

Option: Stainless Steel body&door 304

Size: customized as per as your request




Fire Surface Mounted Double Vertical Cabinet

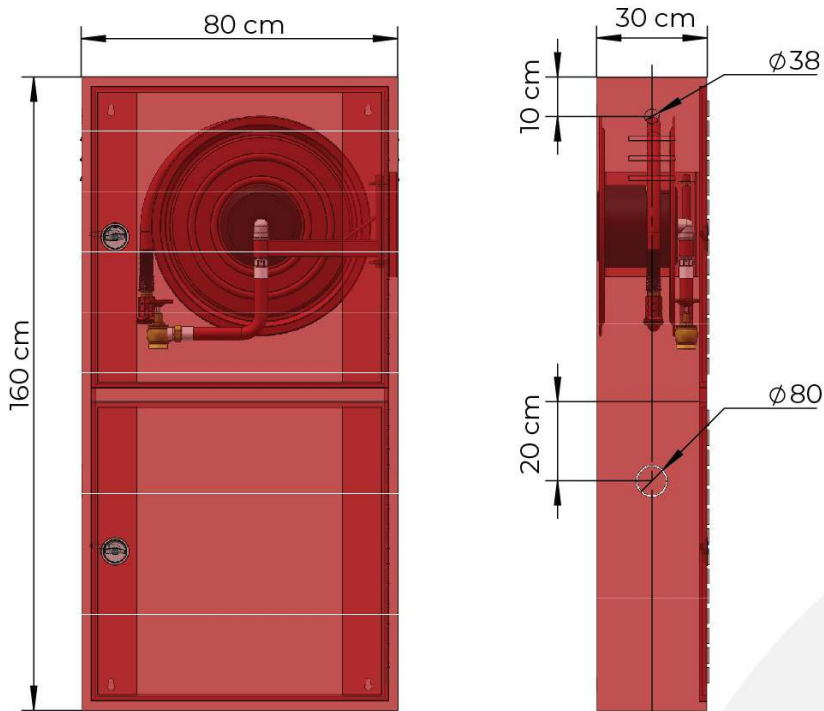

Option: Horizontal Cabinet



Ground Fixed Cabinet (Free Stand Cabinet)

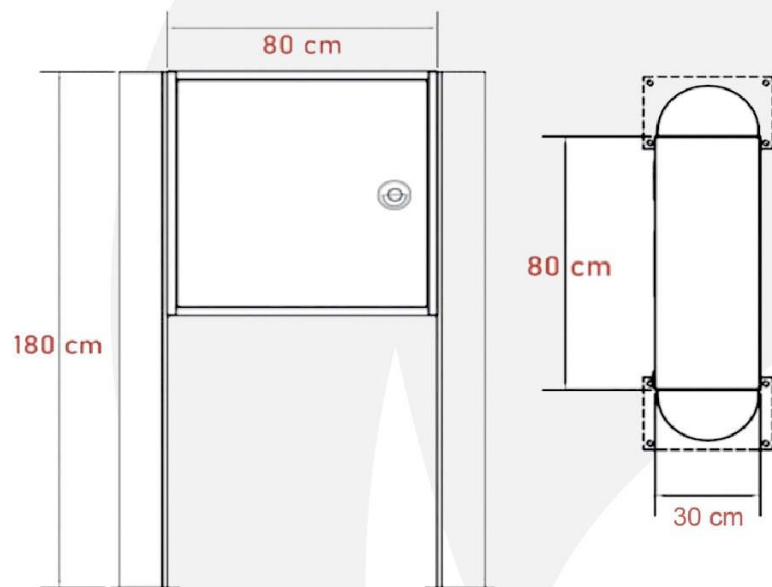

Technology Requirement:

1. Red polyester powder coated finish.
2. Surface Colour: RAL3000
3. Full length piano hinges
4. 1.2mm mild steel body&door
5. Stainless steel round lock
6. Size for Vertical Double Cabinet: 160x80x30 cm
7. Size for Horizontal Double Cabinet: 110x80x30 cm
8. Size for Free Stand: 180x80x30 cm

Option: Stainless Steel body&door 304

Size: customized as per as your request



FIRE HOSE REEL LPCB Ref NO 1038Ba EN671 APPROVED

Model FGHR 2530M
Manual swinging type 1"x 30m

Model FGHR 2530A
Auto swinging type 1"x30m

Technical Specification: Automatic or Manual


- Hose Reel Designed to BS EN 671- part 1-2001
- Discs are 1.2mm Pre treated Electra Galvanized steel sheet with Electrostatic powder coating.
- Maximum Swinging angle wall mounted is 180°
- Hose designed to BS EN 694 non kinking reinforced rubber.
- Hose Working Pressure 12 Bar
- Hose Burst Pressure 42 Bar
- Hose Test Pressure 18 Bar 48/55 52/62
- Can take 20/25/30m of 19mm or 25mm hose
- Easy to install, operate and service

OPTION

Stainless steel drum



OPTION NOZZLE

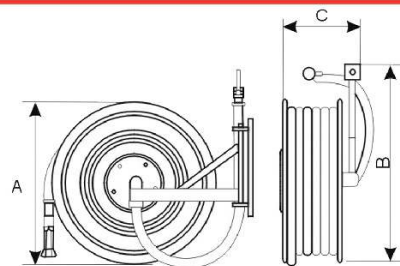

Manual Type 1" Hose Reel

Model No.	Type	Hose Diameter & Length	Height (A in mm)	Width (B in mm)	Depth (C in mm)
FGHR 2530M	Manual & Swinging	25mm x 30m	600	570-580	210



Size	WP	BP
1" x 1W	12 Bar	42 Bar

Outer layer is coated by UV inhibitor, colorfast



1.5" ANGLE VALVE

- Working pressure 18bar
- Brass Valve



BRASS NOZZLE

FG-09

Model No.	Setting	Nozzle diameter	Inlet size	Flow rate at 2 bar/ 6 bar (L/Min/Jet/ Spray)	Throw range at 2 bar
N-09-2	Jet/Spray	8mm	600	> 39/68	> 11.2

OPTION Automatic 1" Hose Reel

Model No.	Type	Hose Diameter & Length	Height (A in mm)	Width (B in mm)	Depth (C in mm)
FGHR 2530A	Automatic & Swinging	25mm x 30m	600	610-680	230

OPTION VALVES



Gate Valve



Lock Shield Valve



Ball Valve




1" PRV

OPTIONAL MODELS WITH DIFFERENT BRACKETS AVAILABLE


Model FGHR 2530MS

1" x30m Manual Fixed pipe Hose reel

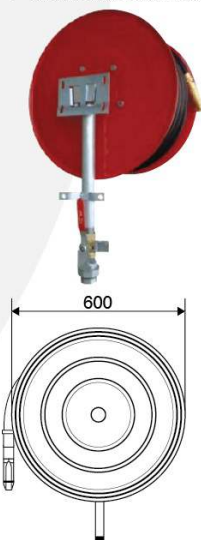

Model FGHR 2530MP

1" x30m Manual swinging pipe Hose reel

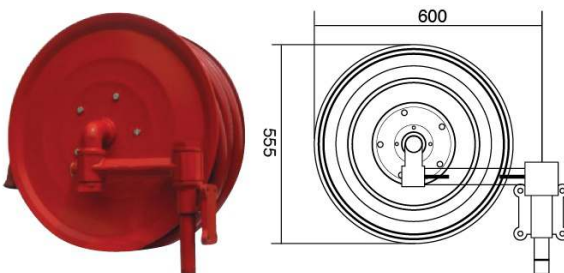



FIRE FIGHTING HOSE

UL, FM Approved
250PSI

Construction -polyester filaments in warp and in weft direction with a smooth EPDM lining for low friction loss.

Standard Colour: White (OPTION Red)

Technical Data:

Model	Size	Work Pressure	Burst Pressure
FGH25-250 - Single Jacket	2.5"	250 Psi	750 Psi

Standard Lengths: 30m

BS336 Coupling in Aluminium (OPTION Brass)



OPTION

MODEL	TYPE	SIZE	WORK PRESSURE-PSI	BURST PRESSURE-PSI	APPROVAL
FGH300	DOUBLE JACKET	2 1/2"	300	900	UL

JET/SPRAY BRANCHPIPE WITH WATER CURTAIN

FG07-131C-00 - Aluminium body & pipe - Spray/Jet



Flow Control : Jet and Spray

Working Pressure : 16 Bar

Test Pressure : 34 Bar

Inlet Connection : BS336

JET/SPRAY BRANCHPIPE



FG07-131C-00

Jet/Spray Branchpipe


Size	H(mm)	W(mm)	Inlet	Outlet
DN50	405	165	G 2"	9mm
CMM	440	165	Storz-C	9mm
DN65	440	165	BS336	12.5mm




MODEL: FGH 25-250



Single Jacket Hose

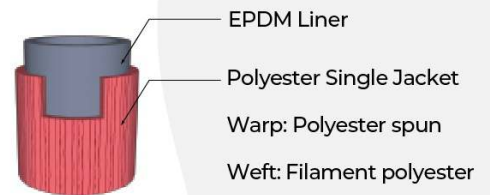

OPTION Double Jacket Hose

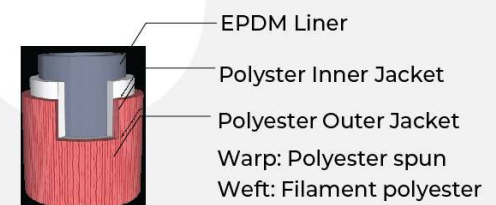

ANGLE HOSE VALVE

- UL, FM approved
- 300psi
- Double Female
- NPT Inlet
- Brass Valve

